

200P WATT to 250P WATT



**Super-Spar-Preis
ab 236,80 €
Qualitätsmodule**



Why LDK Solar Modules

- Industry leading module power output warranty
- Module performance reinsurance policy
- International quality, safety and performance certifications
- Modules manufactured at ISO 9001 certified factories
- High-reliability with guaranteed 0/+5W peak power classification

Warranty:

- 5 years for product defects in materials and workmanship
- 12 years for 90% of warranted minimum power
- 25 years for 80% of warranted minimum power

Certificates:



- IEC: IEC 61215, IEC 61730 (1&2), conformity to CE
- UL1703 2002/03/15 Ed:3 Rev:2004/06/30
- ULC/ORD-C1703-01 second edition 2001/01/01
- UL and Canadian standard for safety flat-plate
- ISO9001:2008 Quality Management System
- CEC Listed: Modules are eligible for California rebates
- PV Cycle: Voluntary module take back and recycling program

About LDK Solar

Established only in 2005 in China, LDK Solar is the world's largest producer of solar wafers in terms of capacity and a leading solar module manufacturer. The company has expanded its business to meet the solar industry's requirements for high-quality and low-cost solar materials and solutions. As a vertically integrated manufacturer and supplier of photovoltaic (PV) products, LDK Solar has more than 13.000 employees worldwide. The Company's headquarters and manufacturing facilities are located in Hi-Tech Industrial Park, Xin Yu City, Jiang Xi Province in the People's Republic of China. LDK Solar maintains sales, marketing, and customer services offices throughout Asia, Europe and North America.

LDK Solar PV Value Chain



ELECTRIC CHARACTERISTICS (STC*)

Type	200 P-20	205 P-20	210 P-20	215 P-20	220 P-20	225 P-20	230 P-20	235 P-20	240 P-20	245 P-20	250 P-20
Nominal Output (Pmax) [W]	200	205	210	215	220	225	230	235	240	245	250
Warranted Minimum Power [W]	194	198.85	203.7	208.55	213.4	218.25	223.1	227.95	232.8	237.65	242.5
Flash Test Power Classification	0/+5 W	0/+5 W	0/+5 W	0/+5 W	0/+5 W	0/+5 W	0/+5 W	0/+5 W	0/+5 W	0/+5 W	0/+5 W
Voltage at Pmax (Vmp) [V]	29.5	29.6	29.7	29.8	29.8	29.9	29.9	30.0	30.0	30.1	30.2
Current at Pmax (Imp) [A]	6.75	6.93	7.07	7.23	7.40	7.53	7.68	7.84	7.98	8.14	8.28
Open Circuit Voltage (Voc) [V]	36.0	36.0	36.1	36.3	36.5	36.7	36.8	36.8	36.9	37.2	37.5
Short Circuit Current (Isc) [A]	7.82	7.82	7.83	7.98	8.14	8.24	8.34	8.35	8.35	8.48	8.59
Maximum System Voltage	IEC: 1000 V / UL: 600 V										
Maximum Series Fuse Rating	12A										
Cell Efficiency [%]	14.12	14.47	14.83	15.18	15.53	15.89	16.24	16.59	16.94	17.29	17.64
Module Efficiency [%]	12.25	12.56	12.87	13.17	13.48	13.79	14.09	14.40	14.70	15.01	15.32

STC* (Standard Test Conditions): Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

ELECTRICAL PERFORMANCE AT NOCT

Type	200 P-20	205 P-20	210 P-20	215 P-20	220 P-20	225 P-20	230 P-20	235 P-20	240 P-20	245 P-20	250 P-20
Nominal Output (Pmax) [W]	145	149	152	156	159	163	167	170	174	178	181
Voltage at Pmax (Vmp) [V]	25.1	25.7	26.2	26.3	26.4	26.7	27.1	27.4	28.0	28.1	28.2
Current at Pmax (Imp) [A]	5.80	5.80	5.81	5.93	6.04	6.12	6.19	6.22	6.23	6.33	6.42
Open Circuit Voltage (Voc) [V]	33.1	33.1	33.2	33.4	33.6	33.8	33.9	33.9	34.0	34.3	34.5
Short Circuit Current (Isc) [A]	6.33	6.33	6.34	6.46	6.59	6.67	6.75	6.76	6.76	6.87	6.95

NOCT: Irradiance 800 W/m², Module Temperature 45±2 °C, Air Mass 1.5

TEMPERATURE CHARACTERISTICS

Type	LDK-P-20 Series
NOCT**	45±2 °C
Temperature Coefficient of Pmax	-0.47 % / °C
Temperature Coefficient of Voc	-0.34 % / °C
Temperature Coefficient of Isc	0.06 % / °C
Operating Temperature	-40°C to +85°C

NOCT**: Nominal Operation Cell Temperature Sun 800W/m²; Air 20°C; Wind speed 1m/s

MECHANICAL CHARACTERISTICS

Type	LDK-P-20 Series
Solar Cells	60(6x10) polycrystalline cells 156mm
Front Cover	3.2mm thick, low iron tempered glass
Back Cover	TPT (Tedlar-PET-Tedlar)
Encapsulant	EVA (Ethylene vinyl acetate)
Frame	Anodized aluminium alloy, double wall
Diodes	6 Bypass diodes serviceable
Junction Box	IP65 rated
Connector	MC4 or compatible connector
Cables	Length: 1200 mm / Section: 4.0 mm ²
Dimension	1642 x 994 x 40 mm / 64.6 x 39.1 x 1.6 inches
Weight	20 Kg / 44.1 lbs
Max. Load	Certified to 5400 Pa

PACKING CONFIGURATION


Type	LDK-P-20 Series
Packing Configuration	24 pcs. / box
Quantity / Pallet	48 pcs. / pallet
Loading Capacity	624 pcs. / 40ft (H)

Partner:


EMOSOLAR eG.

PERFORMANCE AT LOW IRRADIANCE

The typical relative change in module efficiency at an irradiance of 200W/m² in relation to 1000W/m² (both at 25°C and AM 1.5 spectrum) is less than 6%

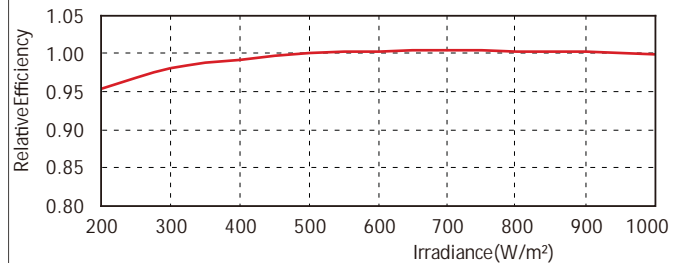


IV CURVE AT DIFFERENT IRRADIANCE LEVELS

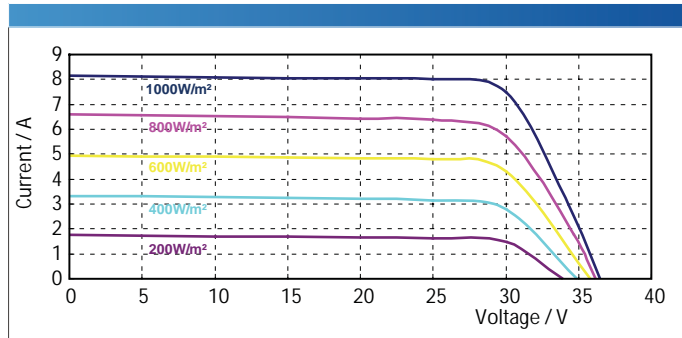

Above graphics according to LDK-220P-20

DIMENSIONS

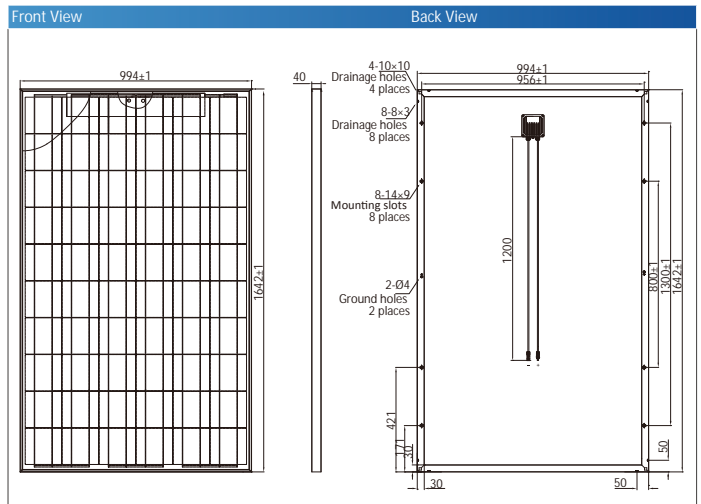

Contact Us:

module.sales@ldksolar.com

www.ldksolar.com

Erstellt mit

nitroPDF professional

LDK Solar reserves the right to make specifications changes without any prior notice.
Download der Gratis-Version von nitroPDF.com professional
June 2010/V1/EN/ © LDK Solar Limited. All rights reserved.

